


Diaphragm Pumps for Air, Gases and Vapours

INNOVATIVE
TECHNOLOGY
WORLDWIDE

KNF
NEUBERGER

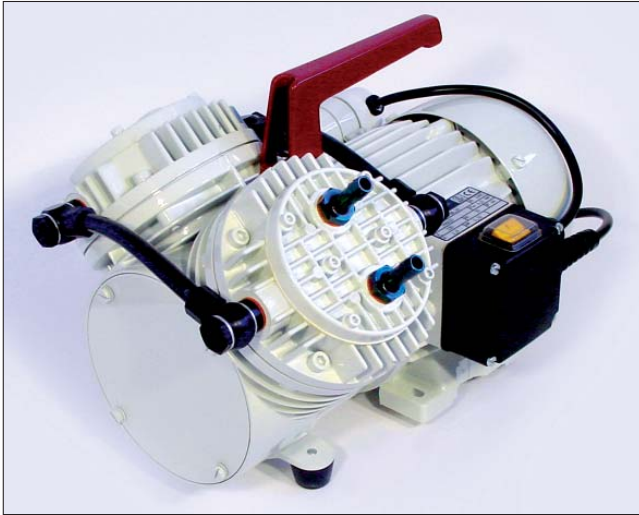

Diaphragm Vacuum Pumps and Compressors

Technical features:

- 100% oil-free transfer
- Pure transfer, evacuation and compression
- For slightly aggressive or corrosive gases and vapours
- Maintenance-free
- Environmentally friendly
- Gastight, leakage rate approx. 6×10^{-3} mbar x l/s, not tested in serial production.

Series N 035.1.2 A_.18 Pumps

Series N 035.1.2 diaphragm pumps are double-head, dry-running devices used in a wide range of laboratory applications. They transfer, compress and pump down without contamination.

The pumps are available in various versions differing in the materials which contact the media.

Technical data:

	N 035.1.2 AN.18 IP 20-Motor	N 035.1.2 AN.18 IP 44-Motor
Delivery (l/min) ¹⁾	55	55
Ultimate vacuum (mbar abs.)	100	100
Operating pressure (bar g)	4	4
Connectors for tube (mm) ID 9		ID 9
Permissible gas and ambient temperature	+5...+40 °C	+5...+40 °C
Voltage/Frequencies	230V/50Hz	230V/50Hz
Motor protection	IP 20	IP 44
Power P ₁	300 W	320 W
Operating current	1.55 A	1.9 A
Weight	11.3 kg	11.6 kg
Dimensions L x H x W (mm) With thermal switch	294/222/250	322/222/250

Motors with other voltages and frequencies on request.

¹⁾ at atm. pressure

Material in contact with the pumped media

Type/OrderNo.	Pump head	Diaphragm	Valves
N 035.1.2 AN.18	Aluminium	CR	Stainless steel
N 035.1.2 AT.18	Aluminium	PTFE-coated	Stainless steel

Choose the pump and the motor in accordance with the following example:

N 035.1.2 AN.18 with IP 44-Motor.

Chemically-resistant versions

	N 035.1.2 AT.18 IP 20-Motor	N 035.1.2 AT.18 IP 44-Motor
Delivery (l/min) ¹⁾	50	50
Ultimate vacuum (mbar abs.)	100	100
Operating pressure (bar g)	4	4
Connectors for tube (mm) ID 9		ID 9
Permissible gas and ambient temperature	+5...+40 °C	+5...+40 °C
Voltage/Frequencies	230V/50Hz	230V/50Hz
Motor protection	IP 20	IP 44
Power P ₁	300 W	320 W
Operating current	1.55A	1.9 A
Weight	11.3 kg	11.6 kg
Dimensions L x H x W (mm) With thermal switch	294/222/250	322/222/250

Motors with other voltages and frequencies on request.

¹⁾ at atm. pressure

Accessories

Description	Details	for Type	Order No.
Silencer/Filter	G 1/4		000352
Pressure relief valve	4 bar	N 035.1.2 AN.18	047601
Fine control valve with pressure gauge	pressure side	N 035.1.2 AN.18	000482
Fine control valve with vacuum gauge	suction side	N 035.1.2 AN.18	000354


KNF reserves the right to make changes.

KNF 3/2004 Produced in Germany


Diaphragm Pumps for Air, Gases and Vapours

Dimensions and performance characteristics

Pump down time for 20 l receiver

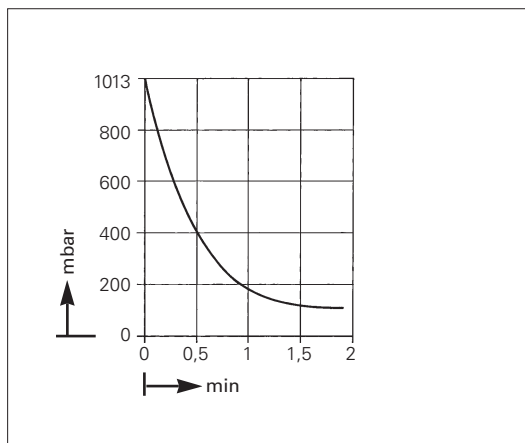

Performance characteristics

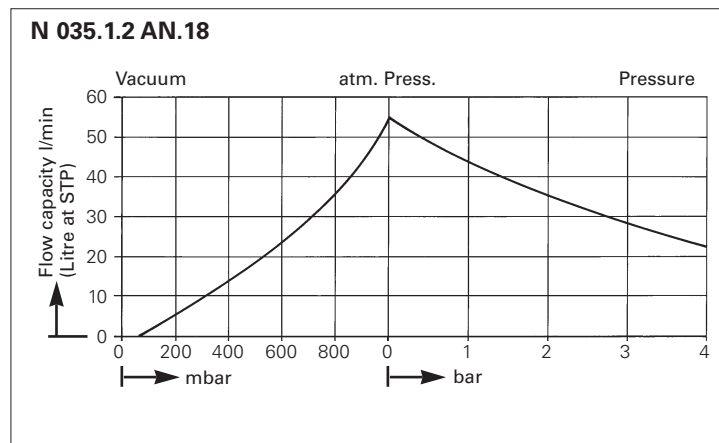

Dimensions (mm)

